


Containment Boom Detail

BOOM ENDS FINISHED WITH #4 BRASS GROMMETS SEATED AT 3 INCH CENTERS ONTO 6000 LB NYLON WEBBING


INTERNALLY SHACKLED CHAIN USING STAINLESS STEEL PLATE (STANDARD)

STAINLESS STEEL HARDWARE (NUTS AND BOLTS) - BOLTS PLACED AT 3 INCH SPACING (STANDARD)

3/8" SELF-LOCKING PIN WITH 1 1/2" LOOP AND LANYARD ASSEMBLY INCLUDED (STANDARD)
 ASTM PIN HOLE LOCATIONS (STANDARD) - CUSTOM PIN HOLE LOCATIONS AVAILABLE UPON REQUEST

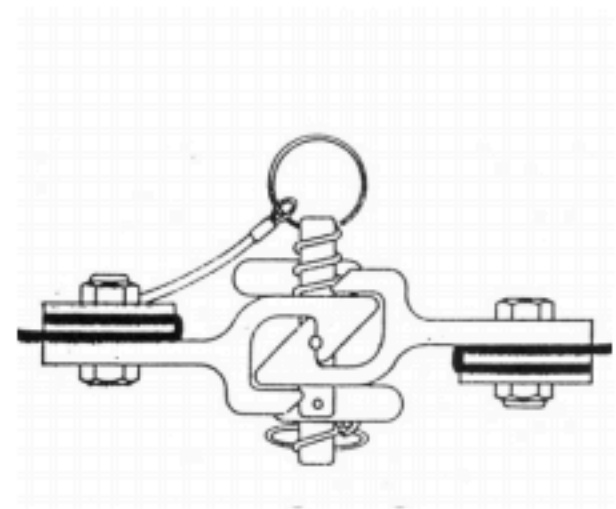

ASTM Universal Slide Coupler

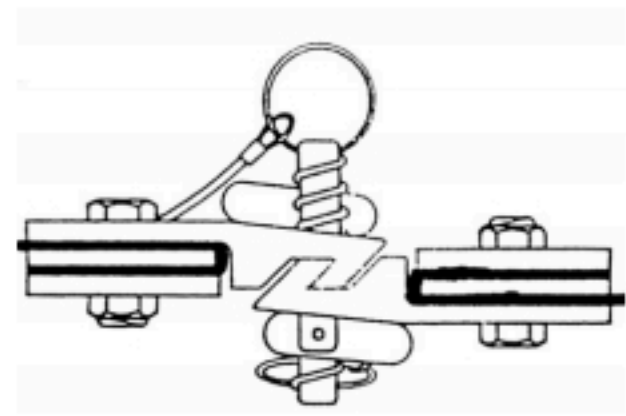

ASTM Quick Latch Coupler

Coupler Specifications